



1

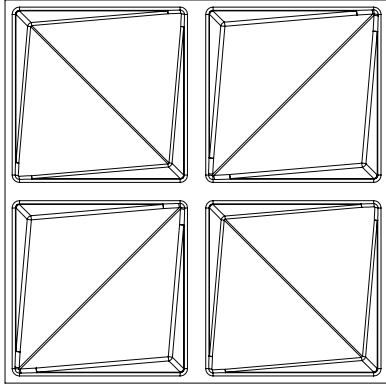


Unpack the product carefully and inspect for quantity and transportation damage. Keep product in a clean and dust free environment. **Important!** These tiles are designed to work with standard 15/16 inch exposted tee commercial ceiling suspension systems.

2

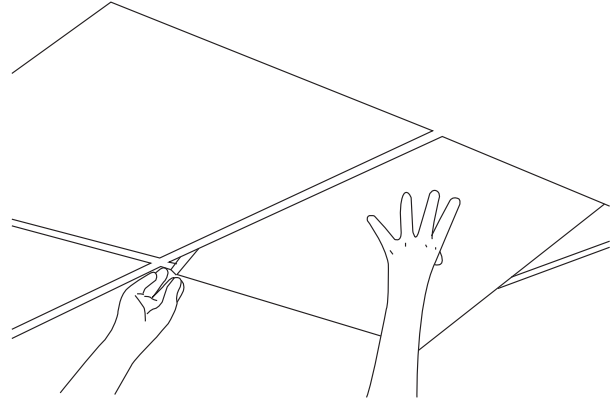


If replacing old ceiling tiles, remove the tiles and ensure the grid is clean, secure and square.

3

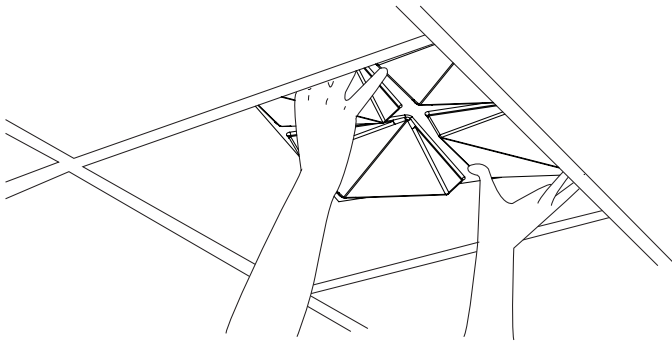

Tilt tiles at an angle to insert into ceiling grid. Position the tile perimeter so it sits flat on the grid. Tiles on the edges can be cut with a sharp utility knife or power tools. Mark with masking tape for accuracy.

4

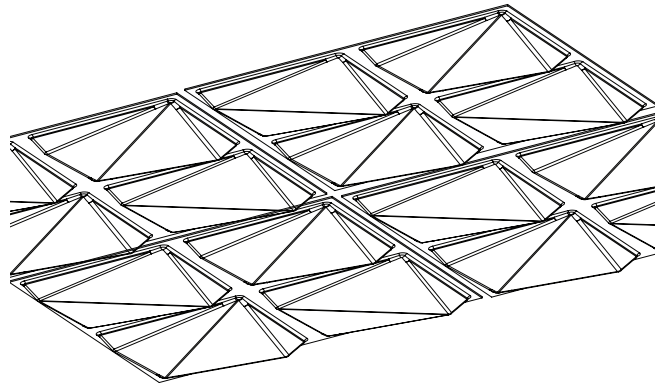

For complex cuts or room edges use our Edge ceiling tiles.

MIOCULTURE.COM

Still have questions?
Drop us a line or give us a call:

Email: info@mioculture.com
US Toll Free: 1 - 888 - 563 - 3916
International: +1 (215) 925 - 9359

