



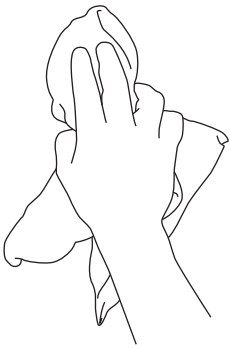


Suggested Supplies


-  Cutting Tools: Utility knife or most power cutting tools
-  Adhesives: Fuze*It by Liquid Nails construction adhesive or double sided mounting tape (not included)
-  Primers (required): Rust-Oleum® specialty plastic primer or equivalent
-  Paints (Optional): Compatible latex or oil-based paints
- Additional Tools: Laser Leveler, Straight Edge, Hand Level, Paint Sprayer, Paint Brush & Masking Tape

1



Prepare the installation surface by cleaning it thoroughly.


2

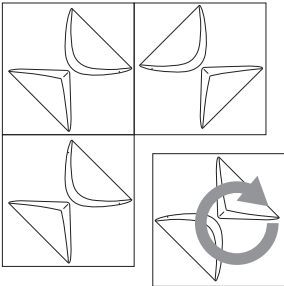

Select a pattern for installation. Arrange it on the floor by rotating the tiles to preview or print out a pattern guide.


PERMANENT
INSTALLATION

3




Apply a 1/4 inch adhesive bead to tile perimeter. Apply 1/4 in away from edge to prevent adhesive squeeze-out. Carefully remove and clean excess adhesive.

4

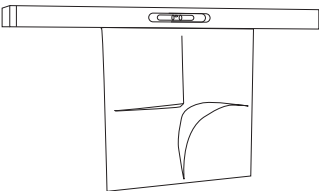


Use a level, lasers and a ruler to ensure tiles are properly aligned.

5

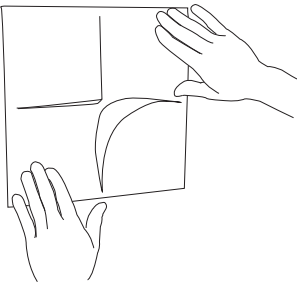


Apply tiles to surface, pressing each firmly, making sure that all corners are in contact with the surface.

6

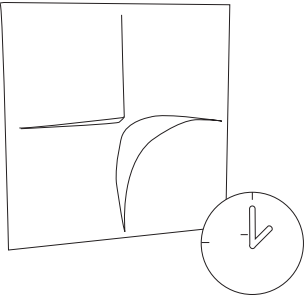


Allow adhesive to dry (following adhesive manufacturers instructions).

7 (Optional)







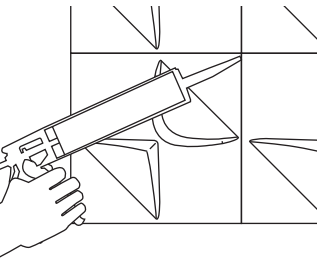


Use Fuze*It to seal the seams. Clean up and smooth as you go along before it sets. Tiles should not be sanded.

8 (Required for painting tiles.)

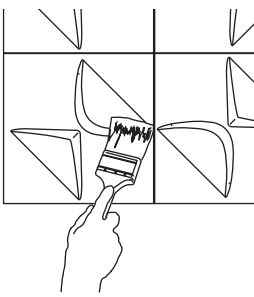

Coat tiles once with plastic primer first and then with the finish of your choice.
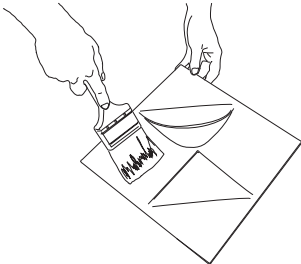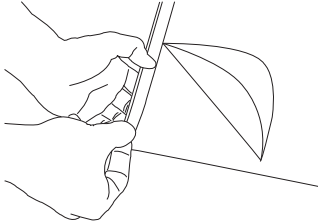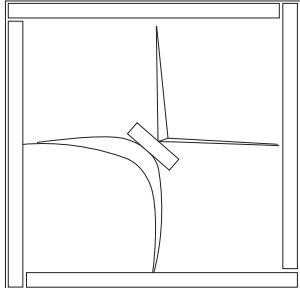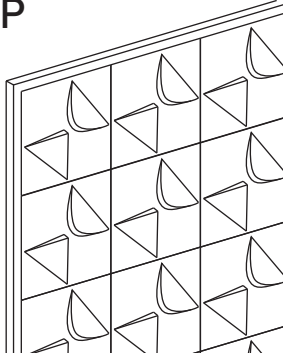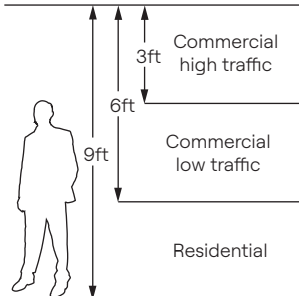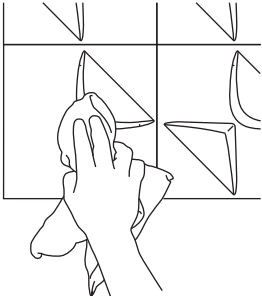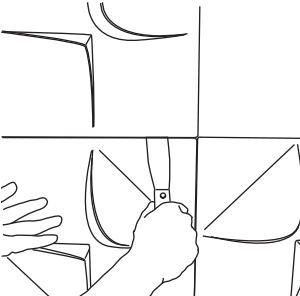
<p>TEMPORARY INSTALLATION</p>	<p>3</p>  <p>Coat each tile with plastic primer first and then the finish of your choice.</p>	<p>4</p>  <p>Apply the selected adhesion method to the perimeter and the center of tile when possible. We recommend 3M mounting tape.</p>	<p>5</p>  <p>Apply tiles to surface pressing each tile firmly. Make sure that all edges are in contact with the surface and that tiles are securely adhered.</p>
<p>TIP</p>  <p>Plasticforms can be installed on a canvas or a thin plywood frame for ease of installation, transportation and finishing.</p>	<p>GENERAL</p>  <p>Make your installation last by applying tiles at a height that makes sense for the environment. Prevent tile damage and keep your Plasticforms looking beautiful.</p>	 <p>Tiles should be dusted or vacuumed regularly. Use a damp cloth or sponge to clean tiles.</p>	 <p>Follow the manufacturers recommended removal directions for each adhesive material. Remove tiles gently to minimize damage to surfaces.</p>

For questions or support
give us a ring—we're here to help!

WWW.MIOCULTURE.COM

Email: info@mioculture.com
US Toll Free: 1-888-563-3916
International: +1 (215) 925-9359

All trademarks, service marks and trade names (MIO Culture, product names and the MIO Culture logo) are owned and registered by MIO. All content including but not limited to text, designs, graphics, photos and all other content ("Content") is a collective work under the United States and other copyright laws and is the proprietary property of MIO Culture. All rights reserved. ©2025 MIOOIM LLC.

